


Operation Manual

For TCP/IP with 290 system

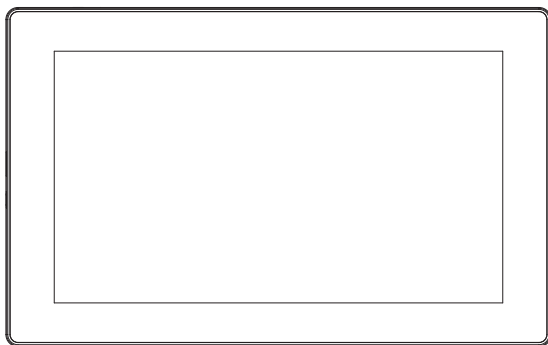

Indoor Monitor

■ Remark

Please follow the user manual for correct installation and testing. If there is any doubt please call our tech-supporting and customer center.

Our company applies ourselves to reformation and innovation of our products. No extra notice for any change. The illustration shown here is only for reference. If there is any difference, please take the actual product as the standard.

CATALOG

Product Features.....	1
Technology Parameters	1
Pictures.....	2
Operations.....	5
1. Security.....	6
2. Smart	12
3. Intercom	15
4. Message	18
5. Setup.....	18
Web Settings	21
System Configuration	23
System Diagram	26
Installation	28
Troubleshooting	31
Safety Instructions	32

Product Features

1. Building intercom application:

Talkback: Support video call, monitor, unlock and check the call records.

Security: Support 8 alarm zones with 3 states, make the zone and scene setup.

Smart: Support smart home extension by RS485 communication(Optional).

2. Operating system: Linux

Technology Parameters

Voltage: DC 48V

Rated power: 7W(S0/S6/S8)

8W(S3/S9)

Standby power consumption: 3W

Display screen: 7"/10.1"

Touch screen: Capacitive / Resistive touch screen

Resolution: 7": 800x480

10.1": 1024x600

Operating temperature: $-10^{\circ}\text{C} \sim +55^{\circ}\text{C}$

Storage temperature: $-10^{\circ}\text{C} \sim +60^{\circ}\text{C}$

Storage Relative humidity: 20%~80%

CPU: quad-core 1.2 Ghz


Memory: 64MB

Flash: 128MB


IP grade: IP30

Pictures


Model: S0

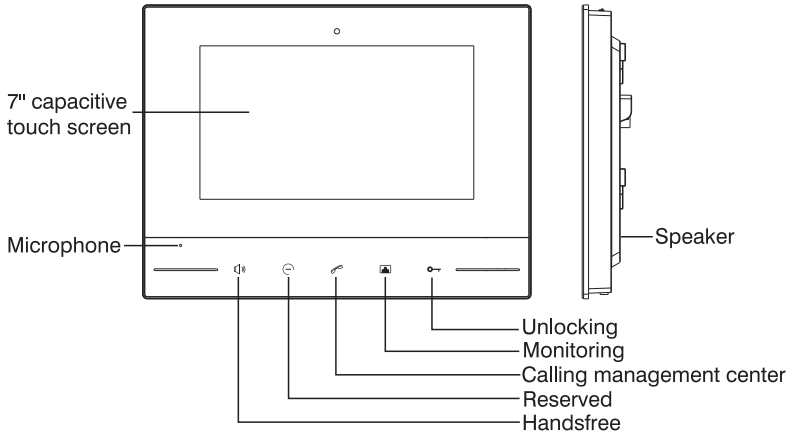


Model: S3

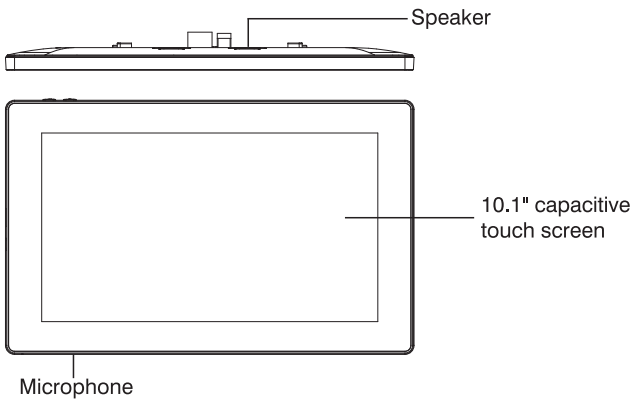


Model: S6

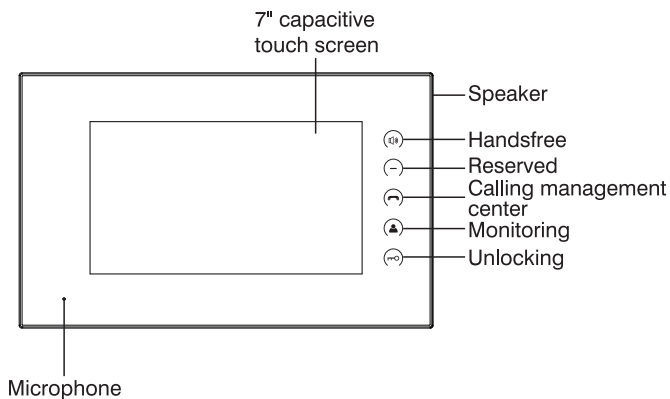

Model: S8

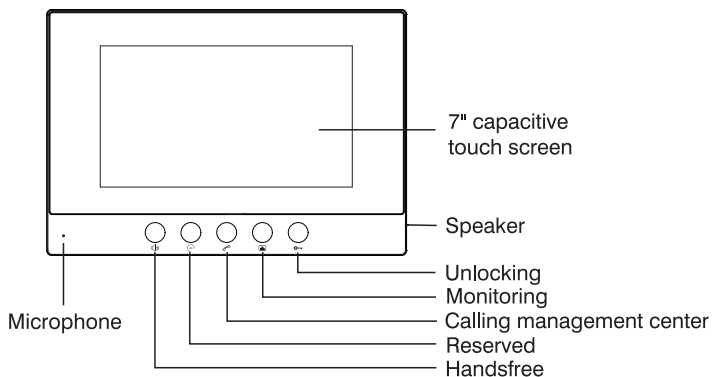


Model: S9

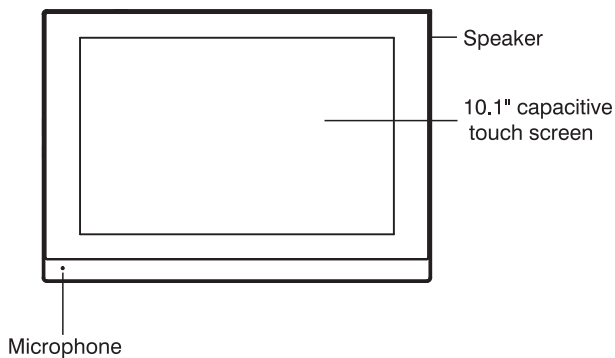

- ◇Indoor monitor doesn't support the connection with external camera, audio extension, WIFI, Bluetooth, external USB and TF storage card.
- ◇Standard indoor monitor doesn't include RS485 communication function. Please contact the supplier if you have such requirement.

Operations

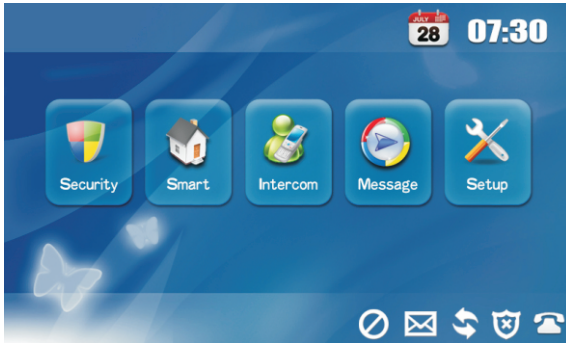







Main interface: Security, Smart, Intercom, Message and Setup.

Status bar: Network connection and security precautions.


Shortcut key: Do Not Disturb, Message, Records.

Status bar instruction:

1. DND : Clicking  icon, the system will enter DND or undo DND. You can use Do Not Disturb service when you don't want to be disturbed by calls(The valid time is 8 hours).
2. Message : Click it to enter the Message interface.
3. Network connection : When the icon keeps on, the indoor monitor is connected to the network.
4. Security precautions : The icon flashes during activation time and keeps on after arming successfully.
5. SIP Registration Status : This icon keeps on when SIP is registered.


1.Security

Click “Security” icon on the main interface, the system will enter the following interface:

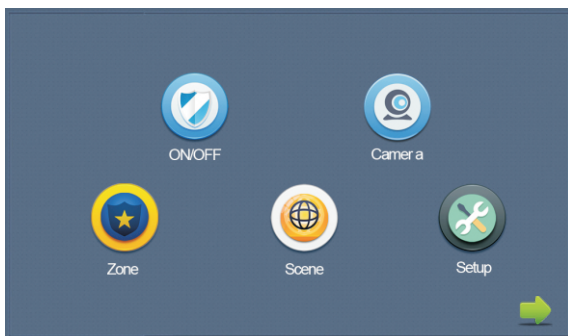

1.1 ON/OFF

Click “ON/OFF” icon, the system will enter the following interface:

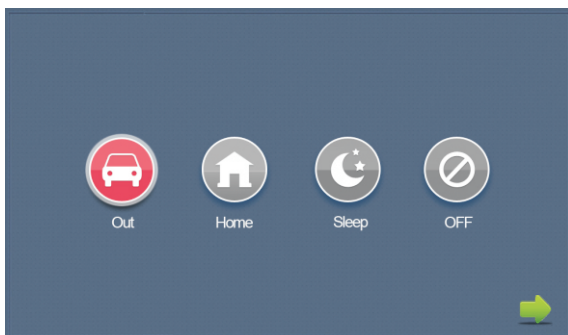

1.1.1 ON

Clicking “Out” “Home”, or “Sleep” icon to active the alarm sensors. The corresponding icon on the main interface will be lit up with a “Di-Di” tone and it will stay lit.


1.1.2 OFF



(1) During the delay time of arming, clicking “OFF” icon, the system will emit a beep. Then the alarm will be stopped.

(2) Input user password(the default password is 1234) to stop the alarm under alarm ON status.

1.2 Camera

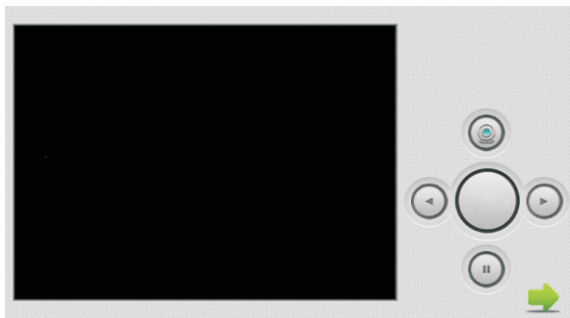
Click “Camera” icon, the system will enter into the following interface:




Clicking “left” or “right” button to select the camera you want, and then  to monitor the IP camera. If you want to cancel monitoring, click  to stop it.

1.2.1 IP Camera Setting


Login the webpage of indoor monitor by username: user, password:1234, and then you can access webpage as below :

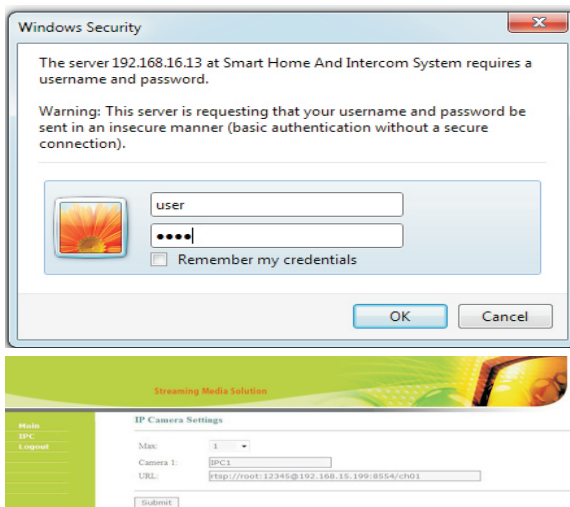

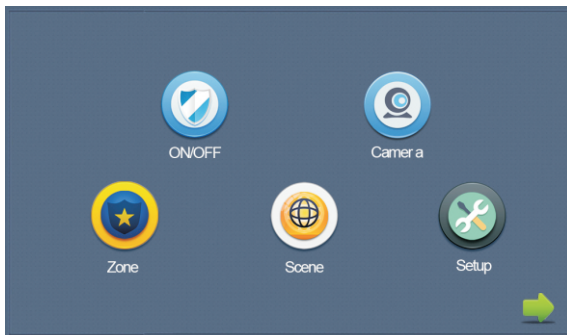

Fill the RTSP format: rtsp:// user: password@ Camera IP. IP is the IP address of your IP Camera. Then you can monitor IP Camera in Security menu on your indoor monitor:

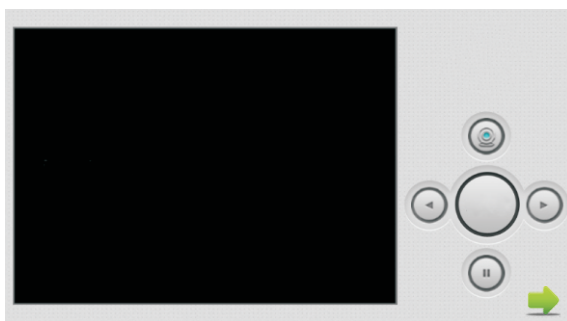

Clicking “Camera” icon, the system will enter into the following interface:




Click “Left” or “Right” button to select IP Camera to monitor, and then click  icon to monitor. Click  to stop monitoring.

1.3 Zone

Remark: It shall be set when the alarm is OFF.

Clicking “Zone” icon and inputting 1-16 digits password(the default password is 1234), the system will enter into the following interface:


NO.	Type	Mode	Delay	Sensor
1	24 Hour	3C	0s	Smoke
2	24 Hour	3C	0s	Smoke
3	24 Hour	3C	0s	Smoke
4	24 Hour	3C	0s	Smoke
5	24 Hour	3C	0s	Smoke
6	24 Hour	3C	0s	Smoke
7	24 Hour	3C	0s	Smoke
8	24 Hour	3C	0s	Smoke

OK 

1.3.1 Alarm Type

Clicking input box of type, a dialog box will pop up as below. On this interface, you can set alarm type as: Normal, Emergency or 24H. 24H and Emergency type are always active.


NO.	Type	Mode	Delay	Sensor
1	24 Hour	3C	0s	Smoke
2	24 Hour	3C	0s	Smoke
3	Normal			Smoke
4	Emerg.			Smoke
5	24 Hour			Smoke
6	24 Hour			Smoke
7	24 Hour	3C	0s	Smoke
8	24 Hour	3C	0s	Smoke

OK 

1.3.2 Mode


Clicking mode setting box, it will pop up a dialog box as the following interface. On this interface, you can set mode as: 3C, NO, NC or BELL.

NO.	Type	Mode	Delay	Sensor
1	24 Hour	3C	0s	Smoke
2	24 Hour	3C	0s	Smoke
3	3C			Smoke
4	NO			Smoke
5	NC			Smoke
6	BELL			Smoke
7	24 Hour	3C	0s	Smoke
8	24 Hour	3C	0s	Smoke

OK 


1.3.3 Delay Time

It refers to the delay time of giving an alarm. Clicking the setting box of Delay, it will pop up a dialog as follows: 0s, 5s, 15s, 20s, 25s, 40s or 60s. Choose the desired delay time. For example if you select 5s as the delay time, the indoor monitor will sound sirens in 5 seconds once the alarm sensor is triggered.

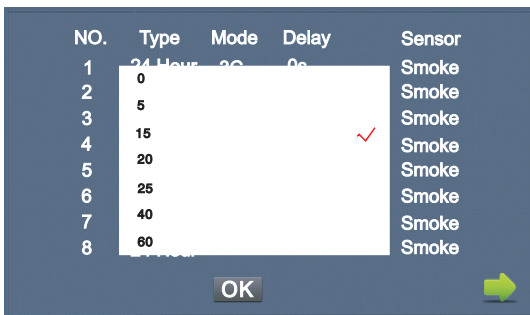

1.3.4 Sensor Type

Clicking input box of sensor type, it will pop up a dialog box as shown in the following interface. Each sensor type can be set up as: Smoke, Gas, PIR, Door, Window, Panic or Flood.

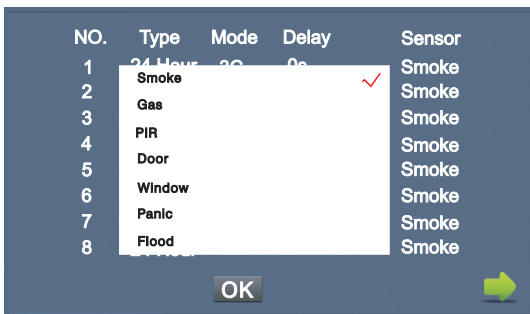

When alarm sensor is triggered, the indoor monitor will make a loud alarm sound, and the system will enter into the following interface as well as send alarm message to management center (if management center is installed in your system):



You can see the No. and sensor type in red color showed at the top of interface. For example, “2: Smoke” indicates that smoke sensor in zone 2 is triggered.


To stop the alarm sound, input the password (the default password is 1234).

1.4 Scene

Clicking “Scene” icon, the system will enter into the following interface:

Activation time: 100s


Mode	1	2	3	4	5	6	7	8
Out	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Home	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Sleep	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

OK 

☒ refers to Alarm ON, and ☐ refers to Alarm OFF. To set the sensor of alarm stations, you can click the corresponding station with ☒ icon. Click activation time to choose the corresponding time. The options of activation time include NONE, 30s, 40s, 60s, 100s and 300s.

1.5 Setup


Clicking “Setup” icon, the system will enter into the following interface:

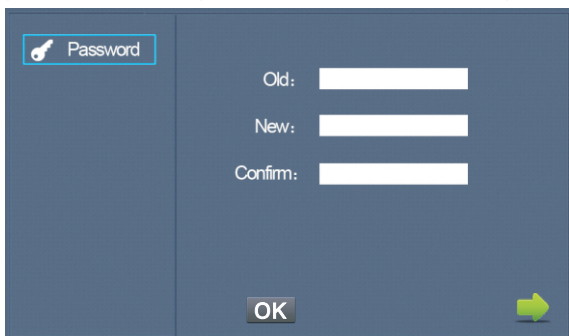The image shows a dark blue rectangular interface for setting a password. On the left, there is a small blue box with a white key icon and the word "Password" in white. To the right of this box, there are three white input fields stacked vertically, each preceded by a label: "Old:", "New:", and "Confirm:". At the bottom center of the interface is a grey button with the text "OK" in white. In the bottom right corner, there is a green right-pointing arrow.

You can set the new user password with 1-16 digits (the default password is 1234). User password is used for security.


2.Smart

Clicking “Smart” icon on the main interface, the system will enter into the following interface:

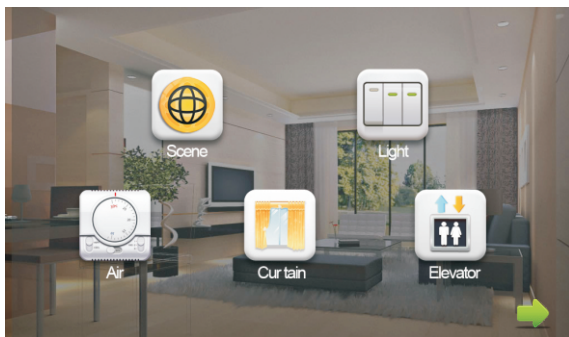

2.1 Scene

Clicking “Scene” icon, the system will enter into the following interface:

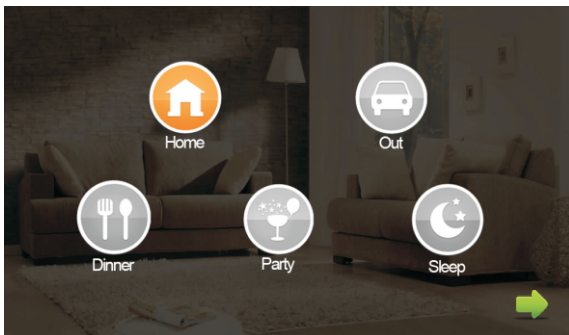

Scene mode includes: Home, Out , Movie, Party and Sleep.

2.2 Light


Clicking “Light” icon, the system will enter into the following interface:



Set the light of corresponding room, such as Master, Sub, Living and Dining (see the room setting for details). 8 lights can be set in every room at most. Clicking the corresponding light icon, you can turn the light ON/OFF.

2.3 Air

Clicking “Air” icon, the system will enter into the following interface:

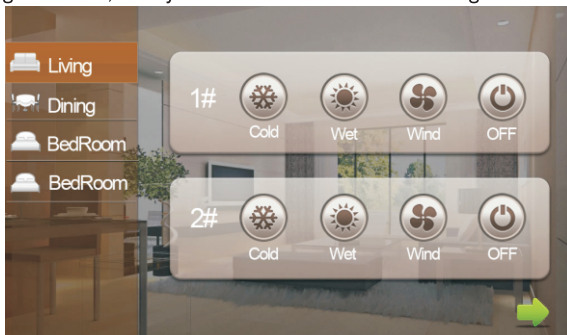

Set the air-condition switch of corresponding room. Click “OFF” icon to turn air-condition on/off; click “Cold” icon to cool; click “Wet” icon to dehumidify; click “Wind” icon to ventilate.

2 air-conditions can be set in every room at most.

2.4 Curtain


Clicking “Curtain” icon, the system will enter into the following interface:



By clicking “Close” icon, the curtain will be closed; by clicking “Open” icon, the curtain will be open; by clicking “Pause” icon, the curtain will be paused.

2.5 Elevator

Clicking “Elevator” icon, the system will enter into the following interface:

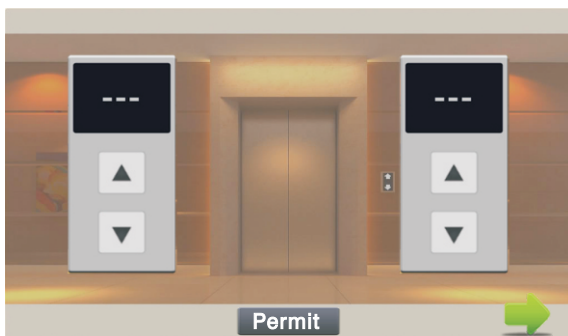


Click ▲ or ▼ icon to control the up and down of the elevator. Click “Permit” icon to open the floor where the indoor monitor locates.

Remark: To support this interface, your system must be connected with “Elevator Control” module. Kindly check with your system provider.


3. Intercom

Clicking “Intercom” icon on the main interface, the system will enter into the following interface:

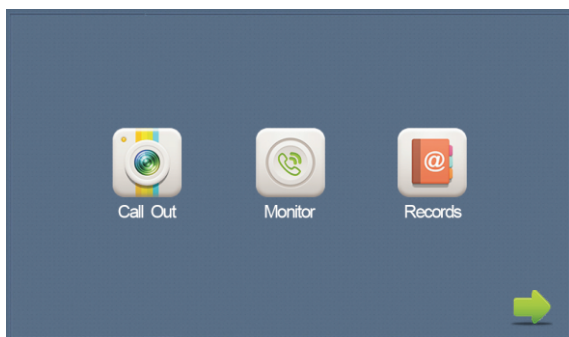


3.1 Call Out

Clicking “Call Out” icon, the system will enter the following interface:

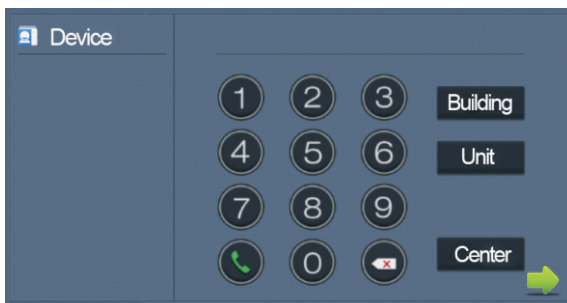




3.1.1 Call unit resident

Input 1-3 digit building No.+ “Building” + 2 digit Unit No. + “Unit” +4 digit room No., then click  icon to call.

The system will enter into the following interface:



When answering the call, the system will enter into call state:

Click  icon to communicate with outdoor panel A; click  icon to end the call; click  icon to unlock the door.


3.1.2 Call management center

Clicking “Center” icon to call management center, the system will call management center 1 to 5 sequentially. If the management center cannot be searched or the call failed, the system will call next management center. When the management center answers, the indoor monitor will ring and stop calling.

Click  icon to end the communication.

3.2 Monitor

Clicking “Monitor” icon, the system will enter the following interface:

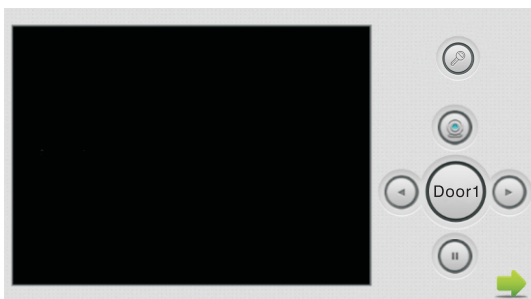

Click “Door1” icon to switch outdoor panel and flat camera mode, click or to select the area you want to monitor, and click to monitor the outdoor panel or flat camera. Click to end the monitor. Click to unlock the door.

Remark: The system’s default monitoring time is 25s.

3.3 Records

Clicking “Records” icon, the system will enter the following interface:

NO.	Number	Date	Length
1	1010801	00-01-02 14:38:40	3s
2	1029901	14-05-29 08:50:21	11s
3	1029901	14-05-29 08:47:12	8s
4	1029901	14-05-29 08:46:49	13s
5	1019901	14-05-13 13:51:27	11s
6	1019901	00-01-01 09:27:37	35s

refers to call-out record; refers to call-in record; refers to missed call record. It can save up to 64 records.

Click or icon to search for records. Select one record and click icon to call; click icon to delete it.

If the snapshot is taken, click icon to view it.

4. Message

Clicking “Message” icon, the system will enter into the following interface:

NO.	Content	Date
1	Announcements	16-10-10 14:44
2	Today's Top Headlines	16-10-13 18:14
3	News Service	16-10-17 15:54
4	Visual Reporting	16-10-19 11:44
<div>▲ ▼ ✖</div>		

Note: only installing the management software on PC which is usually locate at guard center, the indoor monitor can receive the message sent by PC.

Click ▲ icon to page up; click ▼ icon to page down; click ✖ icon to delete the record.

Message can receive up to 64 records.

5. Setup

Clicking “Setup” icon, the system will enter into the following interface:


<div>Normal</div> <div>Romm</div> <div>Network</div> <div>Password</div> <div>Version</div>	<div>Volume: <input type="range"/></div> <div>Intercom: <input type="range"/></div> <div>Language: English</div> <div>TimeZone: + 08:00</div> <div>Auto answer: <input type="checkbox"/></div> <div>OK</div> <div></div>
---	--

5.1 Normal

You can select the volume, intercom, language, time zone and auto answer that you want.

5.2 Room

Click “Room” icon, and then input 1-16 digits password (the default password is 123456) to enter into the following interface:

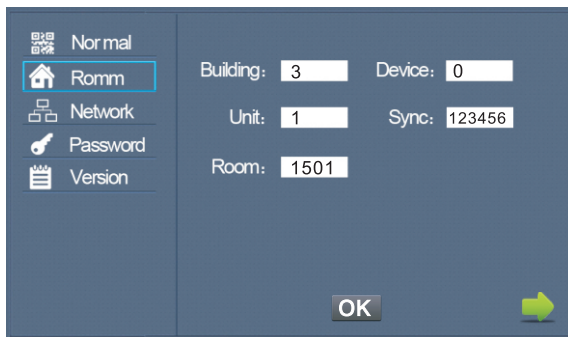


Normal	Building:	3	Device:	0
Romm	Unit:	1	Sync:	123456
Network	Room:	1501		
Password				
Version				

OK

5.3 Network

Click “Network” icon, and then input 1-16 digits password (the default password is 123456) to enter into the following interface:

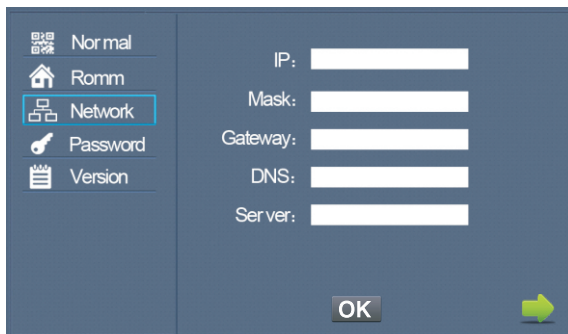

Normal	IP:	
Romm	Mask:	
Network	Gateway:	
Password	DNS:	
Version	Server:	

OK

IP: the system will automatically display IP address of the indoor monitor.

IP address is unique.

The default Mask address is 255.255.255.0. Normally, it is unnecessary to modify.

If you would like to modify, a keypad will pop up when clicking the setting box twice. Enter your new Mask address.

The Gateway in one system must be in the same segment.


DNS: domain name resolution address (DNS of local operator). If indoor monitor is used in WAN, the address must be entered correctly; if it is used in LAN, the address can be ignored.

Server: the system will automatically display IP address of the current indoor monitor.

Click "OK" to save the settings.

5.4 Password


Click "Password" icon to enter into the following interface:

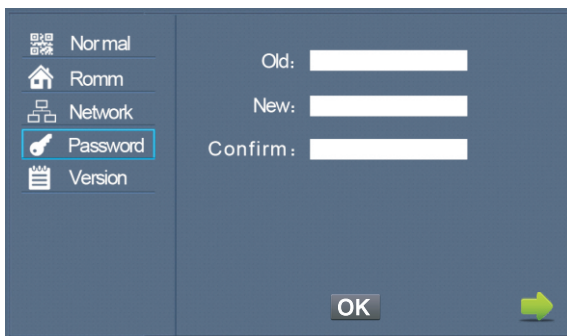

You can set the new system password with 1-16 digits (the default password is 123456). System password is used for system settings.

5.5 Version

Click "Version" icon to enter into the following interface:

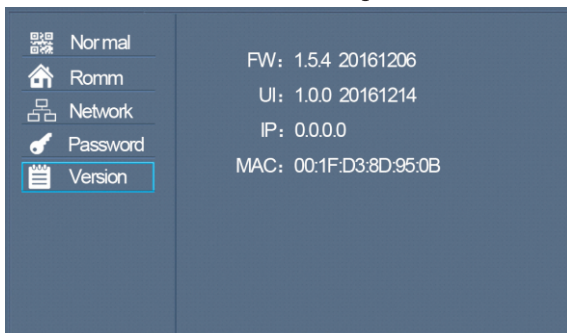

You can look over the relevant information.

Web Settings

Please refer to 5.3 to view IP address.

Connect the indoor monitor and computer by network switch. Input the indoor monitor's IP address in the browser, then input user name and password (the default user name is "admin", the password is "123456" to enter into the web setting interface).



1. Network

Click "network" icon to enter into the following interface:



The user can change the IP address of indoor monitor here.

Checking the box of DHCP will automatically obtain IP address of the current indoor monitor.

Click "Submit" icon to save the settings.

2. RoomNo

Click "RoomNo" icon to enter into the following interface:



Please refer to 5.2 for room settings.

Click "Submit" icon to save the settings.

3. VOIP

Click “VOIP” icon to enter into the following interface:

Streaming Media Solution

SIP Settings

Enable: ☐

Proxy:

Realm:

User:

Password:

RTP:

STUN IP:

STUN Port:

Timeout: 300s

The settings are the same with the ones of indoor monitor.

To connect with SIP phone, check “Enable” and input the number registered in SIP server.

Timeout: Talking time setting.

Click “Submit” icon to save the settings.

4. Logout

Click “Logout” icon to enter into the following interface:

Streaming Media Solution


User Logout

Please click [Submit] to logout user!


Clicking “Submit” icon, the system will log you out.

System Configuration


Villa

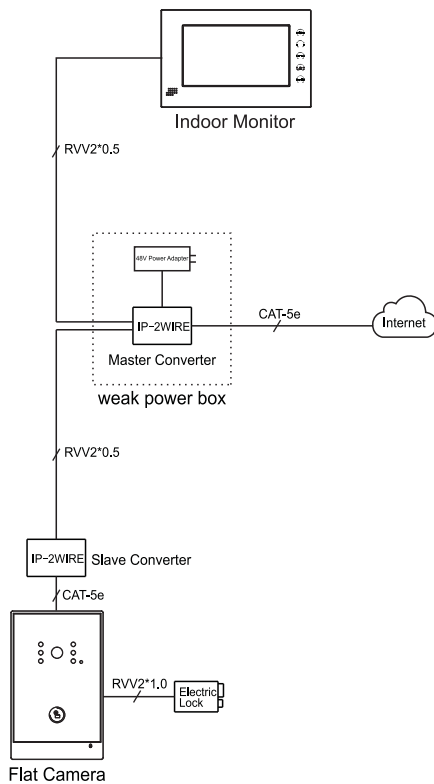


Apartment

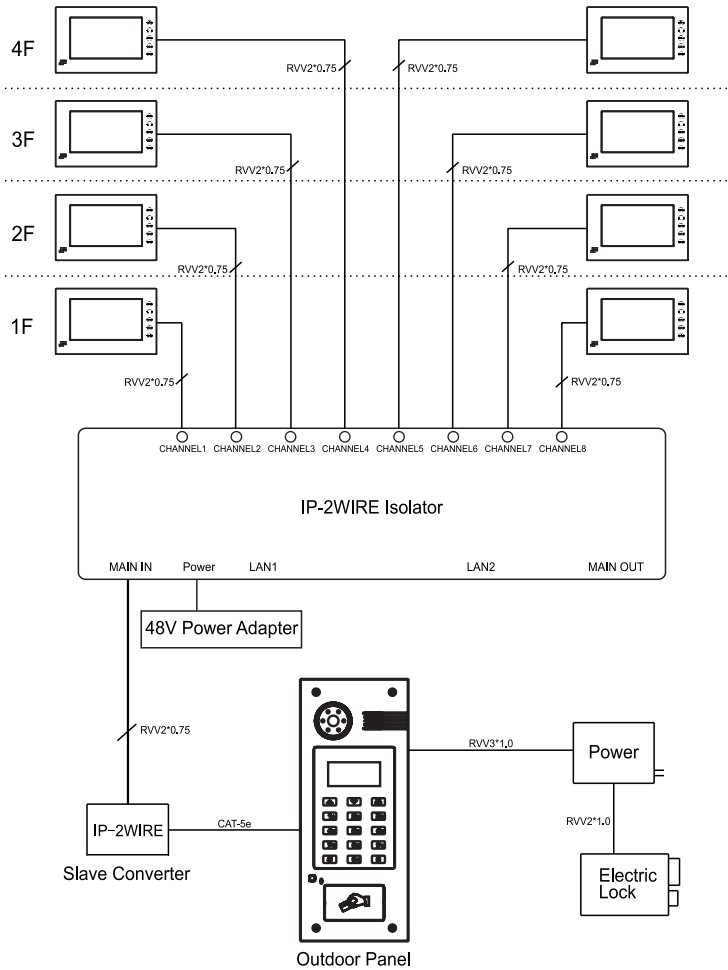

Multi-Apartment

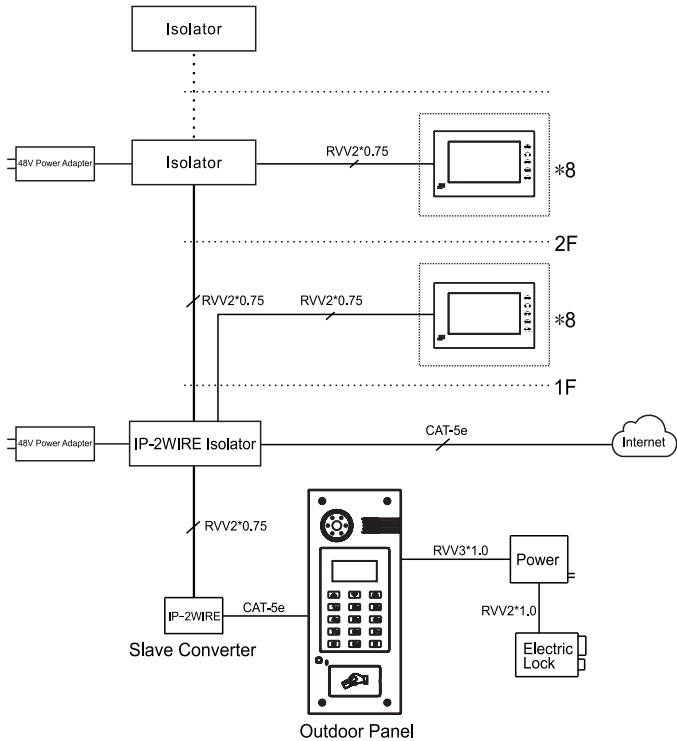


System Diagram

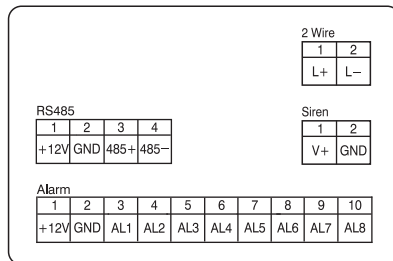

(S0/S3/S6/S8/S9)

1.Power


Power input interface (nonpolar): input power over two-core wire.

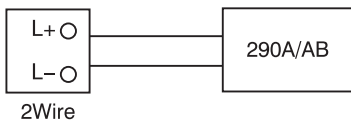

2.RS485


Connect with smart home and alarm external module, etc.

Offer a group of 12V/100mA power by RS485.

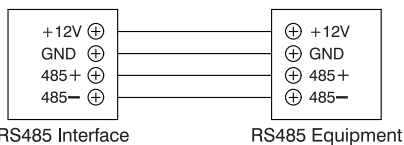

3.Siren


When alarm sensor is triggered, 12V/100mA power is output.



4.Alarm interface(S0/S3/S6/S8/S9)


Each interface of 8 alarm zone with 3states can be connected with normally-open or normally-closed switch.

Offer a group of 12V/100mA power by alarm interface.

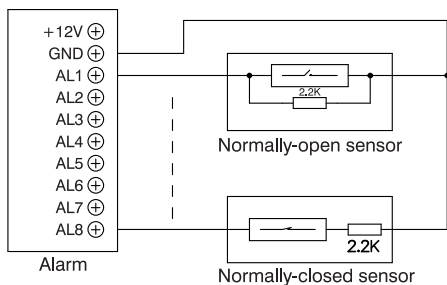


Installation

Model: S0

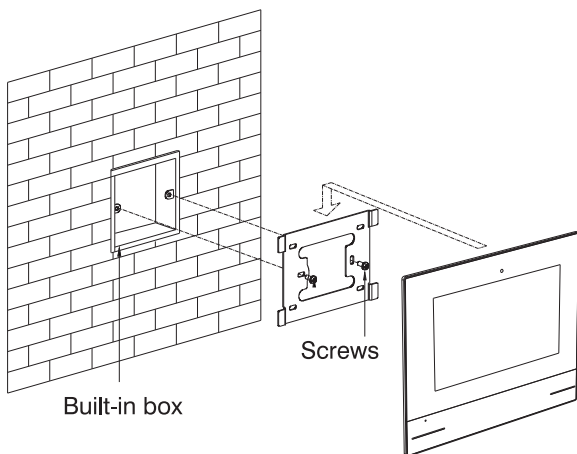


Size: 220.0*166.5*21.5mm

Model: S3

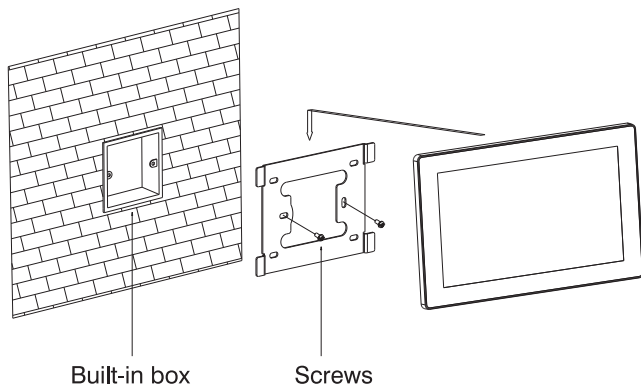


Size: 270*168*15mm

Model: S6

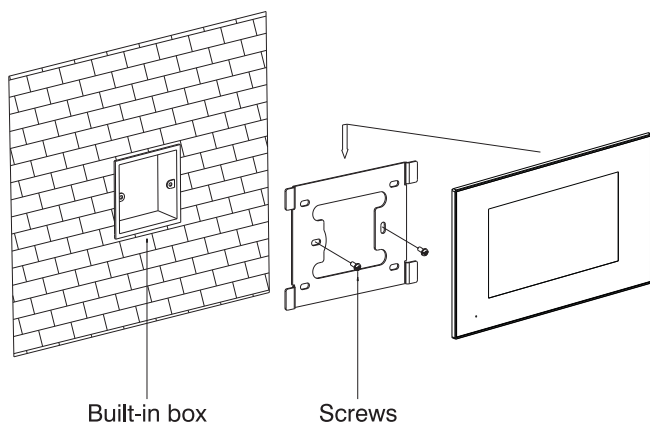


Size: 235*145*19.5mm

Model: S8

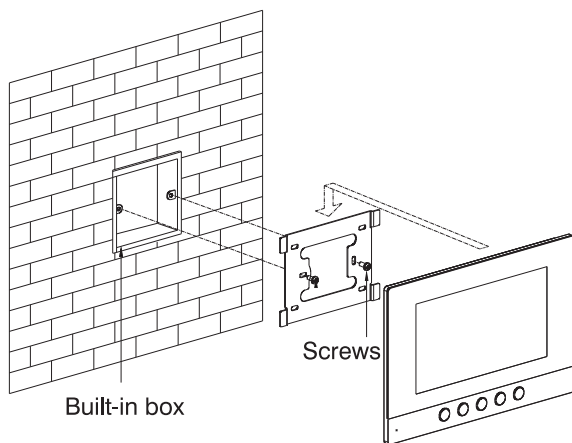


Size: 221.4*151.4*16.5mm

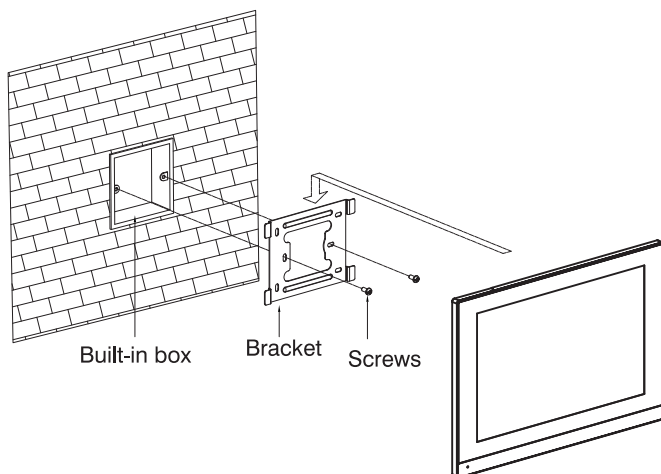

Size: 270*189*16.5mm

Installation Instructions:



【Suggestion】 : During the installation, the camera should be 1450~1550mm above the ground. The camera tether for photographing human face should be the top priority.

Troubleshooting

The indoor monitor cannot start up or power off automatically.

- Check whether it has power-failure, and power it on again.
-

The indoor monitor display screen is too dim.

- Check whether the brightness and contrast settings of screen are correct.
-

No sound during the communication.

- Check whether the indoor monitor is set as mute mode, or the volume is adjusted at the minimum.
-

The indoor monitor cannot monitor the outdoor panel.

- Other user is using the system, so you can use it once he/she finished the operation.
-

Multimedia files cannot be played normally.

- Check whether the system supports the file format. Please refer to multimedia setting for details.
-

No response when clicking indoor monitor display screen.

- Press “Unlock” button for 5s, or slowly slide horizontally or vertically on the LCD to make touchscreen calibration. It needs to be calibrated twice.
-

Touchscreen responses slowly or cannot make calibration.

- Take down any protective paster, since it may affect identification and input for device;
 - Ensure the finger is dry and clean when clicking touchscreen;
 - Restart the device to clear any temporary software error.
-

The temperature of device is too high.

- Long-term use leads to high temperature. It's normal and will not affect the device's use life and performance.

Safety Instructions

In order to protect you and others from harm or your device from damage, please read the following information before using the device.

Do not install the device in the following places:

- Do not install the device in high-temperature and moist environment or the area close to magnetic field, such as the electric generator, transformer or magnet.
- Do not place the device near the heating products such as electric heater or the fluid container.
- Do not place the device in the sunshine or near the heat source. This might cause discoloration or deformation of the device.
- Do not install the device in an unstable position to avoid the property losses or personal injury caused by the falling of device.

Guard against electric shock, fire and explosion

- Do not use damaged power cord, plug or loose outlet.
- Do not touch the power cord with wet hands or unplug the power cord by pulling.
- Do not bend or damage the power cord.
- Do not touch the device with wet hands.
- Do not make the power supply slip or cause the impact.
- Do not use the power supply without the manufacturer's approval.
- Do not have the liquids such as water go into the device.

Clean Device Surface

- Clean the device surfaces with soft cloth dipped in some water, and then rub the surface with dry cloth.

Other Tips

- In order to prevent damage to the paint layer or the case, please do not expose the device to chemical products, such as the diluent, gasoline, alcohol, insect-resist agents, opacifying agent and insecticide.
- Do not knock on the device with hard objects.
- Do not press the screen surface. Overexertion might cause flopover or damage to the device.
- Please be careful when standing up from under the device.
- Do not disassemble, repair or modify the device at your own discretion. The arbitrary modification is not covered under warranty. When any repair required, please contact the customer service center.
- If there is abnormal sound, smell or fume in the device, please unplug the power cord immediately and contact the customer service center.
- When the device isn't used for a long time, the adaptor and memory card can be removed and placed in dry environment.
- When moving, please hand over the manual to new tenant for proper usage of the device.

