



Quick Installation Guide

DNAKE Smart Life Villa Solution

About Quick Installation Guide



Tips to Save Your Time

- For users, whose devices are not Smart Life-supported, please follow the guide from the beginning step by step.
- For users, whose devices are Smart Life-supported, please skip the first chapter (1 Upgrade Indoor Monitor to Smart Life Solution Version).

Contents

1 Upgrade Indoor Monitor to Smart Life Solution Version	1
1.1 Network settings	1
1.2 Load the Upgrade File to Indoor Monitor.....	1
1.3 Add UUID and Authkey of the Indoor Monitor	1
2 Connect Villa Panel to Indoor Monitor	3
2.1 Network settings	3
2.2 Check Building, Unit and Room number of Indoor Monitor.....	3
2.3 Check Build, Unit and Room number of Villa Panel	4
2.4 Call Indoor Monitor by Villa Panel	5
2.5 Add Villa Panel to Indoor Monitor	6
3 Get started with Smart Life app	8
3.1 Download Smart Life app	8
3.2 Register, log in.....	8
3.3 Add devices	9
3.4 Rename devices	10
3.5 Share devices.....	11

1 Upgrade Indoor Monitor to Smart Life Solution Version

Before you start:

- Make sure your network functions well. The Indoor Monitor and computer are under the same LAN.
- Download **Smart Life Solution Version** from the link below for upgrading the Indoor Monitor.
(https://mega.nz/file/d9EH1AyY#tEZm5VBUGNYSHU8dOw3yhhKjZclJtsCbW_b0pKYaH34)
- Download **Remote Upgrade tool** and **Upgrade Instruction** from the link below for upgrading the Indoor Monitor.
(<https://mega.nz/file/hgIDVYxB#6Igsmo031nupq30DosaSxHay0WzwwgFQh5ew521hkAA>)
- As for UUID and Authkey, please contact DNAKE technical support team.

1.1 Network settings


1. Connect the Ethernet cable to Indoor Monitor and computer. Please keep them under the same LAN.

1.2 Load the Upgrade File to Indoor Monitor

1. Load the Smart Life Solution Version **Smart life_v280_nlogo_2021_06_11.img** to your indoor monitor. Please refer to PDF, **Upgrade Instruction**, you have just downloaded with **Remote Upgrade tool**.

1.3 Add UUID and Authkey of the Indoor Monitor

1. The followings are the steps to add UUID and Authkey of the Indoor Monitor.
 - ◆ Step 1: After upgrading, you can double click IP address of the Indoor Monitor on the page of **Remote Upgrade** to open the website. You can also put Indoor Monitor's IP address in the browser's search bar to log in its webpage with account: **special** and password: **123456**. Please note that the account is not admin.

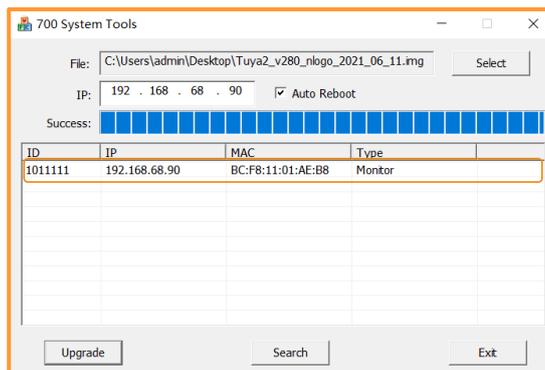

- ◆ Step 2: Go to **Advanced** to change UUID and Authkey to what we have provided for you.

Submit to confirm the change.

Streaming Media Solution

Main
Advanced
Logout

Advanced Settings

MAC:

UUID:

AuthKey:

2. Congratulations. You have done a good job. The Indoor Monitor has been upgraded successfully.

2 Connect Villa Panel to Indoor Monitor

Before you start:

- Make sure the device is in good condition and all the assembly parts are included.
- Make sure your network functions well. The Villa Panel, the Indoor Monitor and computer are under the same LAN. Only when they are under the same LAN can they communicate.
- Download **Remote Upgrade** from the link below for the Villa Panel's IP address.
(<https://mega.nz/file/hglDVYxB#6Igsmo031nupq30DosaSxHay0WzwwgFQh5ew521hkAA>)


2.1 Network settings

1. Connect the Ethernet cable to Villa Panel, Indoor Monitor, and computer. Please keep them under **the same LAN**.


2.2 Check Building, Unit and Room number of Indoor Monitor

1. All other Settings remain default. In case the Villa Panel fails to connect with the Indoor Monitor, you need to check out whether the **Build, Unit and Room number** of the Villa Panel are consistent with the Indoor Monitor's. The followings are the steps to check numbers of the Indoor Monitor.

- ◆ Step 1: Go to the **home page** of the Indoor Monitor. **Click Settings**.

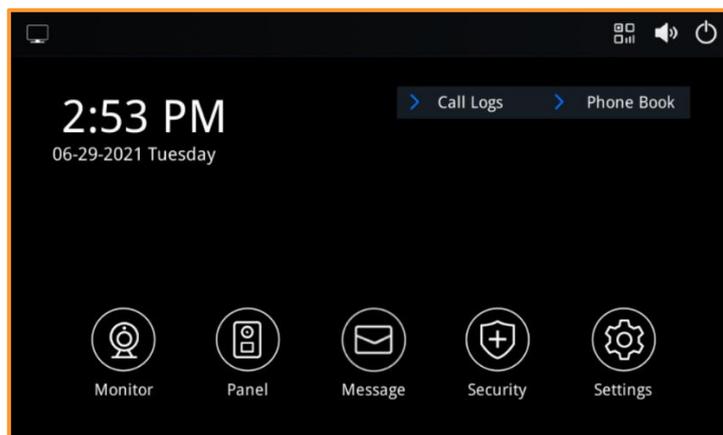


- ◆ Step 2: Click **Room**. If it needs you to type in password, please remember the password is: **123456**. Then you will see **Building, Unit and Room number**.

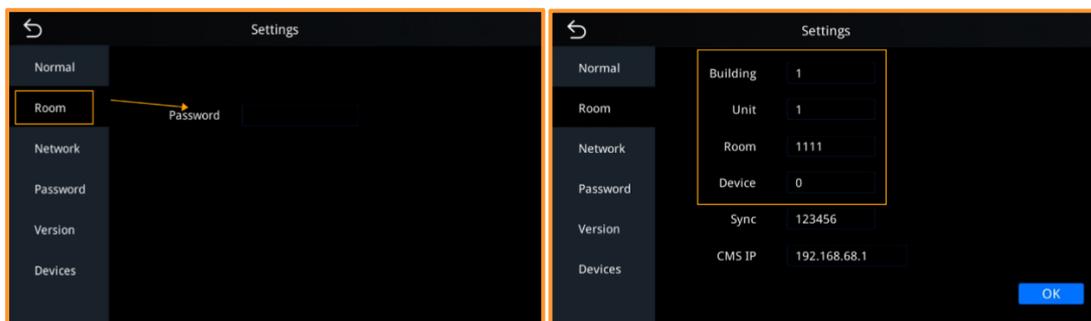

2.3 Check Build, Unit and Room number of Villa Panel


1. Obtain IP address of the Villa Panel.

- ◆ Step 1: Run the software, **Remote Upgrade**, on the computer. Please remember your computer and the Villa Panel should be under the same LAN.
- ◆ Step 2: The information of related devices such as the Villa Panel will show up automatically. Click **Search** to find the IP address if the information failed to show up automatically. Generally, the factory default setting of the Villa Panel's IP address is 192.168.68.90.

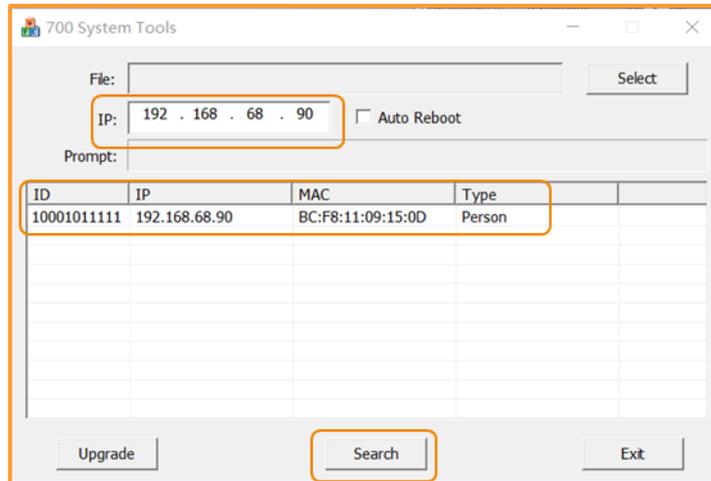

2. Change your computer's Internet Protocol v4 (TCP/IPv4).

- ◆ Your computer's Internet Protocol v4 (TCP/IPv4) should be changed accordingly including IP address and Default gateway (IP address: 192.168.68.xx; Default gateway: 192.168.68.1). This step is a preparation for opening the settings of the Villa Panel.

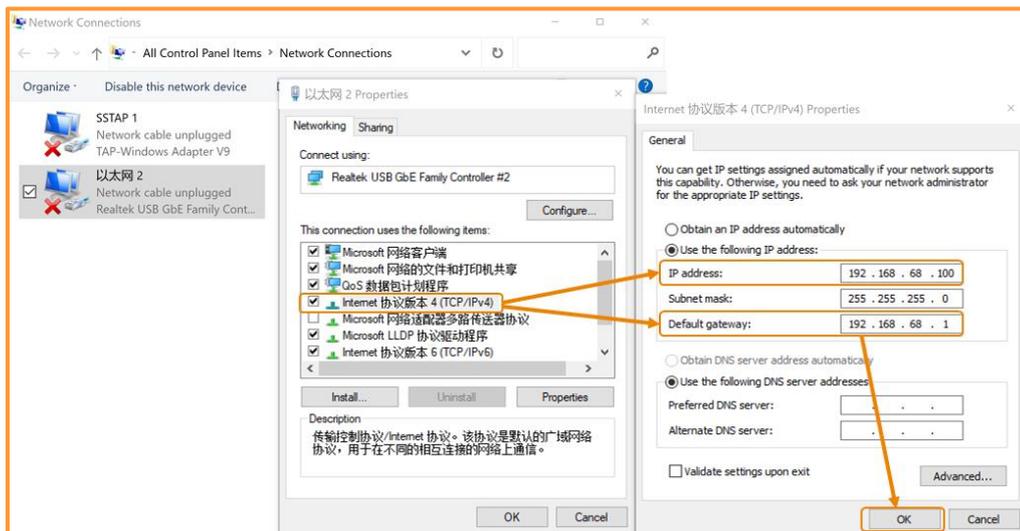

3. The followings are the steps to check numbers of the Villa Panel.

- ◆ Step 1: After the settings, you can double click IP address of the Villa Panel on the page of **Remote Upgrade** to open the website. You can also put Villa Panel's IP address in the browser's search bar to log in its webpage with account: **Admin** and password: **123456**.
- ◆ Step 2: Go to **Device** to check the **Build, Unit and Room number**. Make sure the **Build, Unit and Room number** of the Villa Panel is the same as the Indoor Monitor's.

- ◆ Step 3: Go to **Network. Enable DHCP and Submit.** This step is to guarantee the connection with other devices under the same LAN.

2.4 Call Indoor Monitor by Villa Panel

1. After you have confirmed these numbers, you can try to call the Indoor Monitor. Press **the Button** on the Villa Panel to make this call.




2. You can **answer, reject, open the door, or speak** with the visitor on the Villa Panel.



2.5 Add Villa Panel to Indoor Monitor

1. You can have a test by adding the Villa Panel to the Indoor Monitor. If everything works well, it means you are doing this right.

- ◆ Step 1: Click **Settings** on the **home page**.
- ◆ Step 2: Select **Devices** on the Settings.
- ◆ Step 3: Click  to search the device. The device will show up on the screen.
- ◆ Step 4: Click to select the corresponding **device** before clicking **Save**.

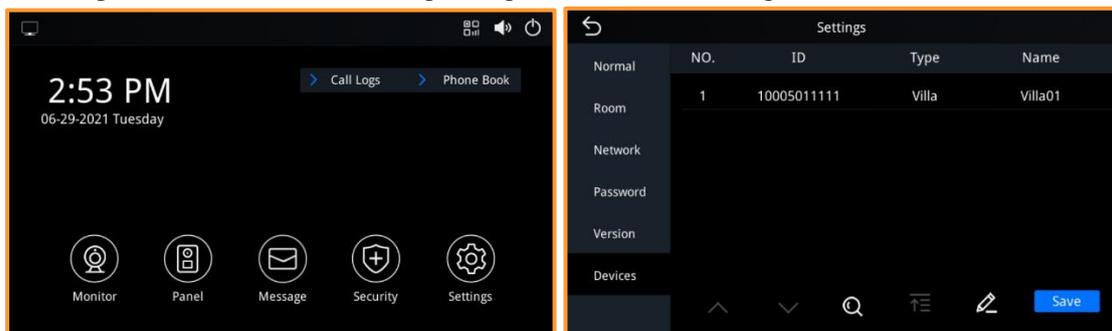

- ◆ Step 5: Press **Panel** on the **home page**, then you can see the real-time pictures on the Villa Panel. You can **switch the device, speak with the visitor, open the door, or pause the monitor**.



2. If you have many devices connecting to the Indoor Monitor, you need to switch devices in the upper right corner of the Panel page to watch the real-time pictures from the Outdoor Station or the Villa Panel. Before switching, you need to press **Pause** in the bottom right to make sure the smooth transition.



3. Congratulations. You have done a good job. The Villa Panel is successfully connected to the Indoor Monitor.

3 Get started with Smart Life app


3.1 Download Smart Life app

You can download the Smart Life app by searching for Smart Life in your app store, Google Play Store or by scanning the following QR code.





3.2 Register, log in

1. Open the Smart Life app and tap **Sign Up**. In the **User Agreement and Privacy Policy** dialog box, carefully read the privacy policy and agreement and tap **Agree** to go to the account registration page.

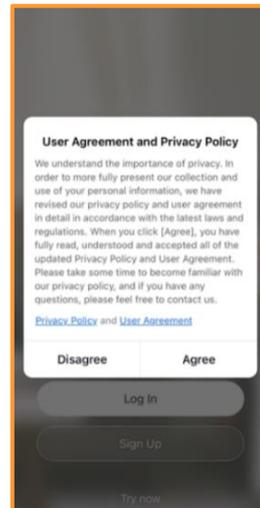


2. Enter your mobile phone number or email address and tap **Get Verification Code**. The country or region on the registration page is the same as that you set in the mobile phone. You can also manually change the country or region before registration.

3. On the **Enter Verification Code** page, enter the verification code. On the **Set Password** page, set the password as per instructions and tap **Done**.

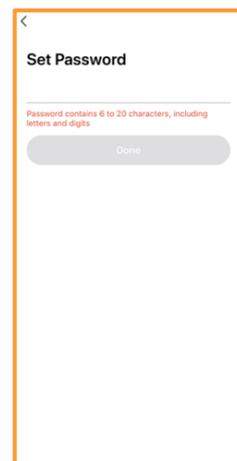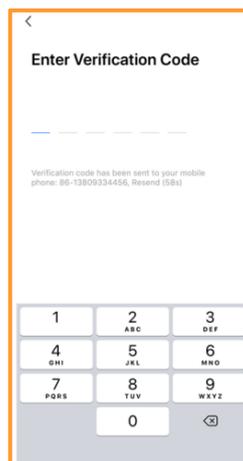


3.3 Add devices

1. Recommended way: Scan QR code on the Indoor Monitor by your app. QR code is right in the corner of the **home page**.

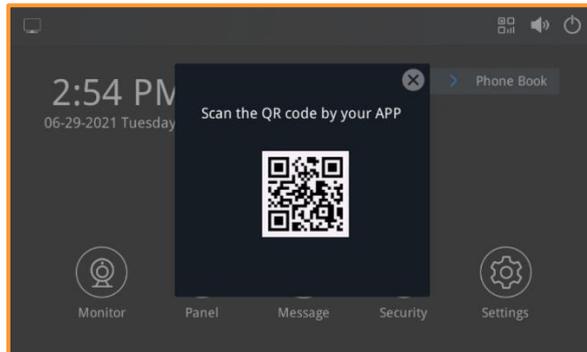

2. Optional way: Tap **Add Device** or the **plus (+)** icon in the top right corner on the **home page** to go to the device adding page. You can manually add devices on the **Add Manually** tab or tap **Auto Scan** to enable the app to automatically detect devices. To add devices on the Auto Scan tab, you need to grant the app related Wi-Fi and Bluetooth permissions.

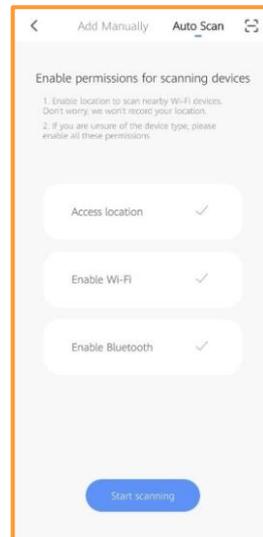


3. After you complete the above steps, the Smart Life app will automatically enter the interface of monitor. You can make a video call to the Outdoor station and unlock remotely on the smart phone.



-  Switch to full screen
-  Take a screenshot
-  Record a video
-  Expand more
-  Messages
-  Features (Gallery, Theme Color, Lock, Edit)
-  Gallery
-  Theme Color (Light Mode & Dark Mode)
-  Lock remotely
-  Edit (Button Management)


3.4 Rename devices

1. After scanning the device, you will see the reminder (Added successfully). In this page, you can edit the name and room of this device.

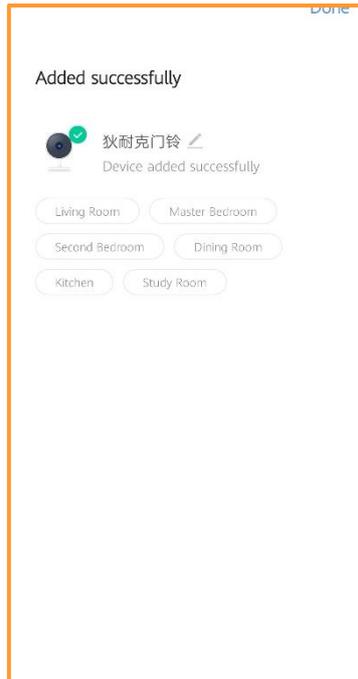

2. After the device is added, you can customize the device name. The following steps and pictures are here for your reference.

- ◆ Step 1: Back to the **home page** and click the device you want to rename.
- ◆ Step 2: Click **Edit** in the upper right corner.
- ◆ Step 3: Select the **icon**.
- ◆ Step 4: Click **Name**.
- ◆ Step 5: Type in whatever you like to rename your device.

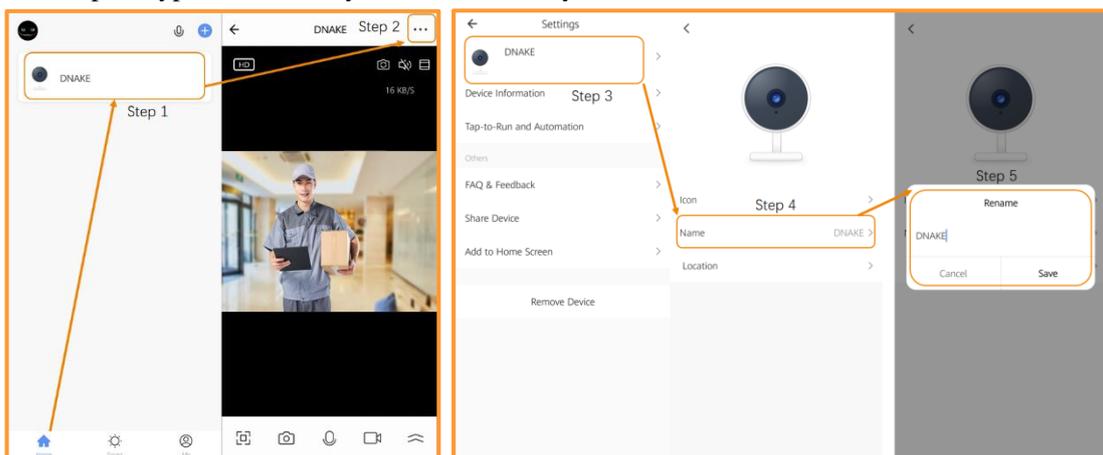


3.5 Share devices

1. After having added devices successfully, you can share devices with your family or friends. A total of 20 users (mobile app) are supported. The following steps and pictures are here for your reference.

- ◆ Step 1: Back to the **home page** and click the device you want to share.
- ◆ Step 2: Click **Edit** in the upper right corner.
- ◆ Step 3: Select **Share Device**

- ◆ Step 4: Add Sharing
- ◆ Step 5: Choose the way you prefer to share your device.

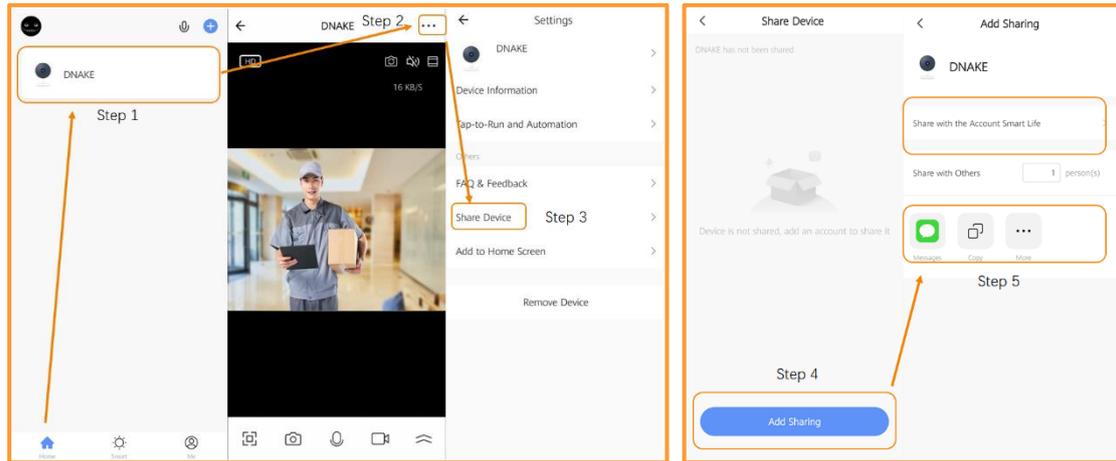

2. Except for the above way, you can also create a home to share your devices in this group. The following steps and pictures are here for your reference.

- ◆ Step 1: Go to **Me** page and then open **Home Management**.
- ◆ Step 2: Select **My Home** or **Create a Home**.
- ◆ Step 3: In the **Home Setting** page, you can rename, locate, or share your device.
- ◆ Step 4: Wait for new members to accept your invitation.

