
INDOOR
MONITOR

MODEL:

N1146

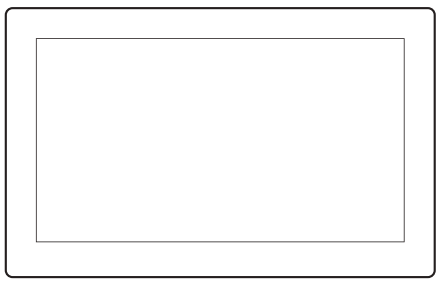

QUICK START GUIDE

REMARK

Please follow the user manual for correct installation and testing. If there is any doubt please call our tech-supporting and customer center.

Our company applies ourselves to reformation and innovation of our products. No extra notice for any change.

The illustration shown here is only for reference. If there is any difference, please take the actual product as the standard. The product and batteries must be handled separately from household waste. When the product reaches the end of service life and needs to be discarded, please contact the local administrative department and put it in the designated collection points in order to avoid the damage to the environment and human health caused by any disposal. We encourage recycling and reusing the material resources.

CATALOG

Package Contents 1

Pictures 1

System Diagram 2

Device Wiring 3

Installation 5


Safety Instructions 7

For specific operation instructions, please scan the following QR code to obtain the full version of the User Manual.


PACKAGE CONTENTS

Please make sure the package contains the following items:

MODEL:N1146



Indoor Monitor



Bracket




Screw




Quick Start Guide


PICTURES

MODEL: N1146

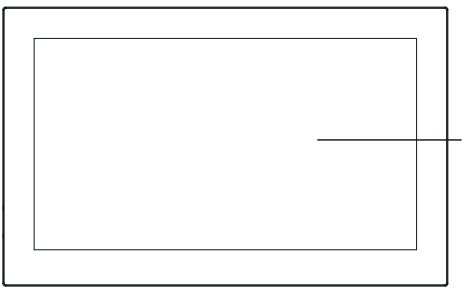




SYSTEM DIAGRAM

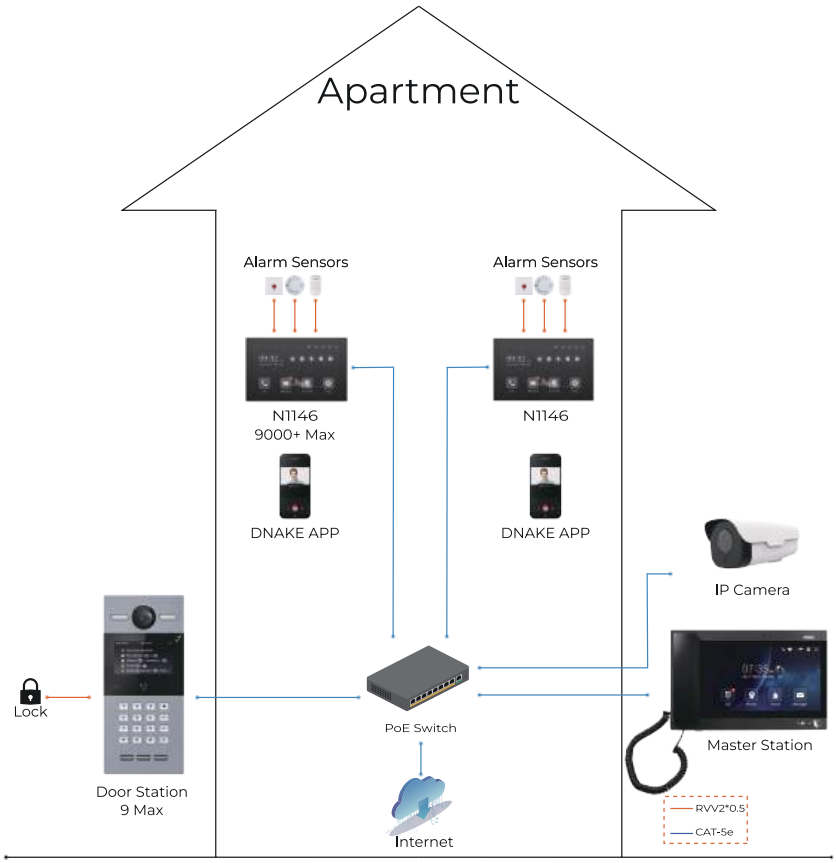


DEVICE WIRING



1.PoE (non-isolated)


Connect with door station, indoor monitor or other network equipment by network switch.

When indoor monitor has PoE function, the interface can supply power by connecting with PoE network switch.



2.Power


Power input interface connect with 12V power adapter.

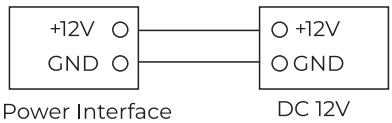

3.Siren/Alarm

Interface of alarm zones connects with normally-open or normally-closed switch.


When the alarm zone is triggered, it will output 12V/100mA power.

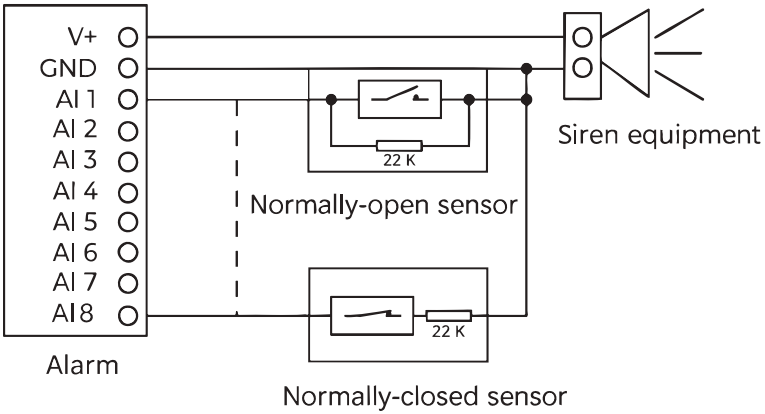

INSTALLATION


MODEL: N1146 (Surface Mounting)


Cut-out Dimension for Surface Mounting Box （Unit: mm）

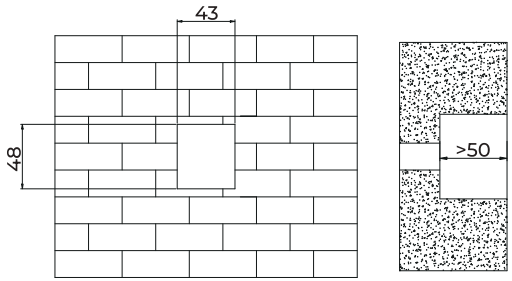


① **Drill holes in the wall.**

② **Align the bracket's center opening with the wall opening and secure it with screws.**



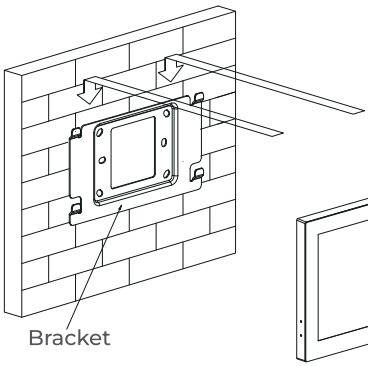


③ **Align the four slots on the back of the indoor monitor with the bracket hooks and slide the unit down to secure it.**

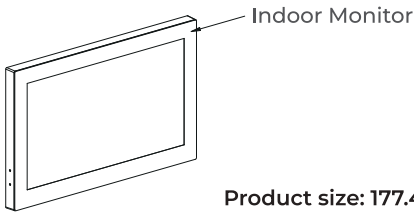

Product size: 177.4x111.3x14mm

Max. product size: 177.4x111.3x22.5mm

Installation Instructions:



[Suggestion]: The camera should be 1450～1550mm above the ground. The camera at this height can capture human face perfectly.

SAFETY INSTRUCTIONS

In order to protect you and others from harm or your device from damage, please read the following information before using the device.

Do not install the device in the following places:

- Do not install the device in high-temperature and moist environment or the area close to magnetic field, such as the electric generator, transformer or magnet.
- Do not place the device near the heating products such as electric heater or the fluid container.
- Do not place the device in the sun or near the heat source, which might cause discoloration or deformation of the device.
- Do not install the device in an unstable position to avoid the property losses or personal injury caused by the falling of device.

Guard against electric shock, fire and explosion:

- Do not use damaged power cord, plug or loose outlet.
- Do not touch the power cord with wet hand or unplug the power cord by pulling.
- Do not bend or damage the power cord.
- Do not touch the device with wet hand.
- Do not make the power supply slip or cause the impact.
- Do not use the power supply without the manufacturer's approval.
- Do not have the liquids such as water go into the device.

Clean Device Surface

- Clean the device surfaces with soft cloth dipped in some water, and then rub the surface with dry cloth.

Other Tips

- In order to prevent damage to the paint layer or the case, please do not expose the device to chemical products, such as the diluent, gasoline, alcohol, insect-resist agents, opacifying agent and insecticide.
- Do not knock on the device with hard objects.
- Do not press the screen surface. Overexertion might cause flopover or damage to the device.
- Please be careful when standing up from the area under the device.
- Do not disassemble, repair or modify the device at your own discretion.
- The arbitrary modification is not covered under warranty. When any repair required, please contact the customer service center.
- If there is abnormal sound, smell or fume in the device, please unplug the power cord immediately and contact the customer service center.
- When the device isn't used for a long time, the adaptor and memory card can be removed and placed in dry environment.
- When moving, please hand over the manual to new tenant for proper usage of the device.

V1.1
600110483401

EASY & SMART INTERCOM SOLUTIONS

DNAKE