


Instruction

The DNAKE E216 provides multiple functions, including audio and video intercom, emergency call, security alarm and lift control, etc. It also supports communication via SIP 2.0 protocol with IP phone and IP-PBX. It allows constructor to make an easy configuration and installation.

DNAKE E216

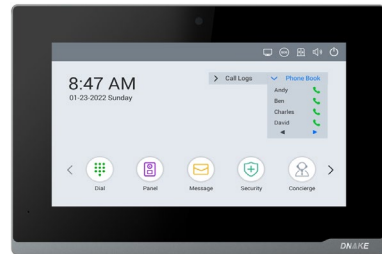

Key Features

- Easy configuration
- 7-inch capacitive touch screen
- Powered by PoE or power adapter (DC12V/2A)
- Support SIP 2.0 protocol, easy integration with other SIP devices
- Easy integration with elevator control system
- Support monitoring 8 IP cameras

Physical

- | | |
|--|---|
| • System: Linux | • RS485: 1 |
| • RAM: 64 MB | • Power Output: 1 (12V/100mA) |
| • ROM: 128 MB | • Doorbell Input: 8 (use any alarm input port) |
| • Front Panel: Plastic | • Alarm Input: 8 |
| • Power Supply: PoE (802.3af) or DC 12V/2A | • Installation: Surface mounting / Desktop |
| • Standby Power: 1.5 W | • Dimension: 195 x 130 x 14.5mm |
| • Rated Power: 9 W | • Working Temperature: -10°C to +55°C |
| • Ethernet Ports: 1 x RJ45, 10/100 Mbps adaptive | • Storage Temperature: -10°C to +60°C |
| | • Working Humidity: 10% to 90% (non-condensing) |



Datasheet

Display

- Display: 7-inch TFT LCD
- Screen: Capacitive touch screen
- Resolution: 1024 x 600

Audio

- Audio Codec: G.711
- Echo Cancellation
- DTMF: RFC2833
- Microphone: Built-in microphone
- Speaker: 8Ω / 1W

Video

- Video Codec: H.264

Networking

- Protocol: SIP, UDP, TCP, RTP, RTSP, NTP, DNS, HTTP, DHCP, IPV4, ARP, ICMP

Package Features

- Package Content:
 - DNAKE E216
(Power adapter not included)
 - Bracket
 - Screwing kit
 - Quick Start Guide
- Qty/CTN: 22 pcs
- N.W/PCS: 0.473 kg
- G.W/CTN: 13.2 kg
- Giftbox Size: 236 x 157 x 45 mm
- Carton Size: 420 x 360 x 359 mm

