


# Datasheet

## Instruction

The DNAKE E307W provides multiple functions, including audio and video intercom, emergency call, and lift control, etc. It also supports communication via SIP 2.0 protocol with IP phone and IP-PBX. Supports fast device configuration via DIP switches.

## DNAKE E307W

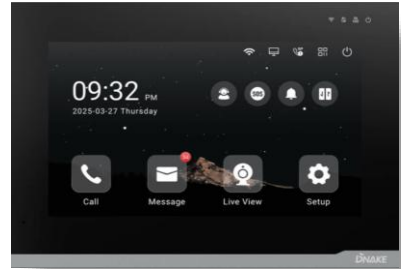

## Key Features

- 7-inch capacitive touchscreen
- 4 indicators: Power, Wi-Fi, DND, In Use
- Supports Wi-Fi
- CCTV Integration
- Supports TF Card
- Video Recording and Screenshots

## Physical

- System: Linux
- RAM: 128 MB
- ROM: 128 MB
- Front Panel: Plastic
- Power Supply: BUS IN or DC 12V
- 2-Wire Port: 2
- Wi-Fi: IEEE 802.b/g/n, 2.4 GHz
- TF Card Slot: 1
- DIP Switch: Support
- Installation: Surface Mounting
- Dimension: 195 x 130 x 14.5 mm
- Working Temperature: -10°C to +55°C
- Storage Temperature: -10°C to +60°C
- Working Humidity: 10% to 90% (non-condensing)



# Datasheet

## Display

- Display: 7-inch TFT LCD
- Screen: Capacitive touch screen
- Resolution: 1024\*600

## Networking

- Protocol: SIP, UDP, TCP, RTP, RTSP, NTP, DNS, HTTP, DHCP, IPV4, ARP, ICMP

## Audio

- Audio Codec: G.711
- Echo Cancellation
- DTMF: RFC2833
- Microphone: Built-in microphone
- Speaker: Built-in speaker

## Video

- Video Codec: H.264

