


Instruction

The DNAKE H218 provides multiple functions, including audio and video intercom, emergency call, security alarm and lift control, etc. It also supports communication via SIP 2.0 protocol with IP phone and IP-PBX. It allows constructor to make an easy configuration and installation.

DNAKE H218

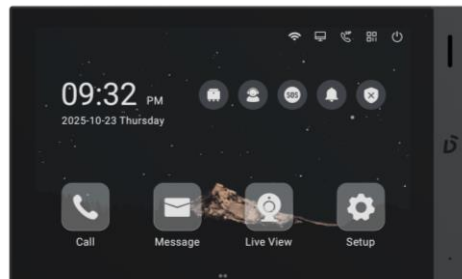

Key Features

- 10.1-inch IPS capacitive touch screen
- Powered by PoE or power adapter(DC 12V/2A)
- Optional Wi-Fi
- Optional Dual Ethernet
- Support monitoring 16 IP cameras
- Support TF card

Physical

- System: Linux
- RAM: 128 MB
- ROM: 128 MB
- Front Panel: Aluminum + Plastic
- Power Supply: PoE (802.3af) or DC 12V/2A
- Wi-Fi: IEEE802.11b/g/n/ax
- Ethernet Port: 1 x RJ45, 10/100 Mbps adaptive
- TF card Slot: 1
- Relay out: 1
- Reset button: 1
- RS485: 1
- Power Output: 1 (12V/100mA)
- Doorbell Input: 8 (use any alarm input port)
- Alarm Input: 8
- Installation: Surface Mounting / Desktop
- Dimension: 264.3 x 160 x 12.8 mm
- Working Temperature: -10°C to +55°C
- Storage Temperature: -40°C to +70°C
- Working Humidity: 10% to 90% (non-condensing)



Datasheet

Display

- Display: 10.1-inch IPS LCD
- Screen: Capacitive touch screen
- Resolution: 1280 x 800

Audio

- Audio Codec: G.711
- Echo Cancellation
- DTMF: RFC2833
- Microphone: Built-in microphone
- Speaker: 8Ω / 1W

Video

- Video Codec: H.264

Networking

- Protocol: SIP, UDP, TCP, RTP, RTSP, NTP, DNS, HTTP, DHCP, IPV4, ARP, ICMP

Package Features

- Package Content:
 - DNAKE H218
(Power adapter not included)
 - Bracket
 - Screwing Kit
 - Quick Start Guide
- Qty/CTN: 12 pcs
- N.W/PCS: 0.57 kg
- G.W/CTN: 11.59 kg
- Giftbox Size: 310 x 194 x 53 mm
- Carton Size: 640 x 350 x 215 mm

