

# Datasheet

## DNAKE TWK04



## Instruction

Embrace security with a simple touch. DNAKE 2-wire Intercom kit is a complete solution that includes a door station, an indoor monitor, and accessories to mount. The new 2-wire intercom kit is immediately ready for use. Improve your safety at home while increasing convenience with DNAKE 2-wire Intercom Kit!

## Key Features

- Plug & Play
- Wi-Fi connection
- IK07 & IP65
- Multiple Unlock methods (IC card (13.56MHz), pin code, Temp key, QR code, APP, Indoor monitor)
- Check alarm notifications on the APP
- CCTV integration
- Extendable to 1 Door stations, 3 indoor Monitors




# Datasheet

## Key Features

- Easy configuration
- 7-inch TFT capacitive touch screen
- Wi-Fi connection
- TF Card Slot
- Support monitoring 8 IP cameras

## DNAKE E217W-2

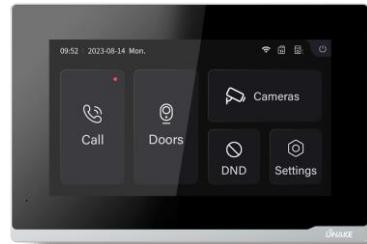

## Physical

- System: Linux
- Front Panel: Plastic
- Power Supply: DC 24V
- Standby Power: 5 W
- Rated Power: 9.5 W
- Wi-Fi: Support 802.11b/g/n 2.4G
- TF Card Slot: 1 X 32G maximum
- Relay Output: 1
- Doorbell Input: 1
- Installation: Surface Mounting
- Dimension: 195 x 130 x 17.6 mm
- Working Temperature: -40°C to +55°C
- Storage Temperature: -40°C to +70°C
- Working Humidity: 10% to 90% (non-condensing)

## Display

- Display: 7-inch TFT LCD
- Screen: Capacitive touch screen
- Resolution: 1024 x 600

## Audio

- Audio Codec: G.711
- Echo Cancellation
- Microphone: Built-in microphone
- Speaker: Built-in speaker

## Video

- Video Codec: H.264



# Datasheet

## Key Features

- 110° wide-angle 2MP HD camera
- Support IC (13.56MHz) card, PIN Code
- 3 Indicator Lights
- 2 Lock Controls (1 relay out, 1 electronic lock)
- Tamper Alarm

## DNAKE S213K-2



## Physical

- System: Linux
- RAM: 64 MB
- ROM: 128 MB
- Front Panel: Aluminum
- Power Supply: Powered by Indoor Monitor
- Standby Power: 3.5 W
- Rated Power: 12 W
- Camera: 2MP, CMOS
- Door Entry: IC card (13.56MHz), PIN code
- Lock Control: 2 (1 relay out, 1 electronic lock)
- IP / IK Rating: IP65 / IK07
- Installation: Surface Mounting
- Dimension: 188 x 88 x 34 mm
- Working Temperature: -40°C to +55°C
- Storage Temperature: -40°C to +70°C
- Working Humidity: 10% to 90% (non-condensing)

## Audio

- Audio Codec: G.711
- Echo Cancellation
- Microphone: Built-in microphone
- Speaker: Built-in speaker

## Video

- Video Codec: H.264
- Video Resolution: 1280 x 720
- Viewing angle: 110°(H) / 60°(V) / 125°(D)
- Max. Image Transfer Rate: 720p – 25fps
- Light Compensation: LED white light

