

# IP Indoor Monitor

## 290M-S8

With Linux OS and customizable UI, it offers multiple functions, including video intercom, door access, emergency call, security alarm, and property management, etc. It also supports communication with IP phone or SIP softphone, etc. via SIP protocol. According to your needs, it can be used with home automation and lift control system. Therefore, when you think about buying IP intercom system, 290 Linux intercom system is also a good choice.




### Specifications:

Physical Property	
System	Linux
CPU	1.2GHz,ARM Cortex-A7
Memory	64MB DDR2 SDRAM
Flash	128MB NAND FLASH
Display	7" TFT LCD, 800x480
Power	Two Wire Supply
Standby power	1.5W
Rated Power	9W
Temperature	-10°C - +55°C
Humidity	20%-85%
Audio & Video	
Audio Codec	G.711
Video Codec	H.264
Display	Capacitive, Touch Screen(optional)
Camera	No
Network	
Ethernet	10M/100Mbps, RJ-45
Protocol	TCP/IP,SIP,2-wire
Features	
IP Camera Support	8-way Cameras
Multi Language	Yes
Picture Record	Yes(64 pcs)
Elevator Control	Yes
Home Automation	Yes(RS485)
Alarm	Yes(8 Zones)
UI Customized	Yes

### Key features:

- Support external 8-way IP cameras
- Integration of elevator control and home automation
- Standard SIP 2.0
- 2-wire IP communication and power supply

### Dimension & Installation:

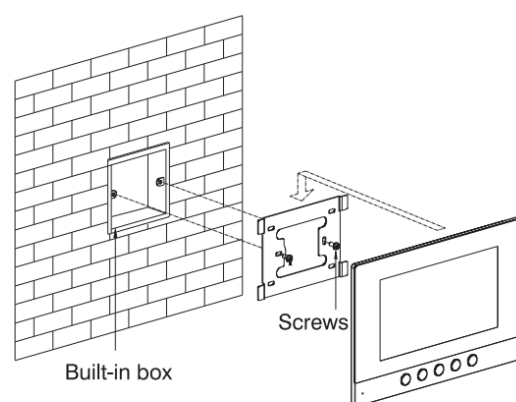

Size: 221.4\*151.4\*16.5mm