


# IP Outdoor Station

## 902D-B5

Dnake SIP-based Android video door phone system is designed to provide an integrated security solution. Our Android video phone system enables you to open the door by facial recognition with liveness detection and gives you the combined benefit of security and convenience.

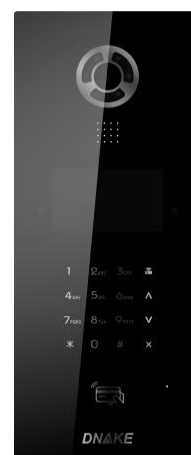

### Specifications:

| Physical Property     |                                  |
|-----------------------|----------------------------------|
| System                | Android 4.4.2                    |
| CPU                   | Quad-Core 1.3GHz                 |
| SDRAM                 | 512MB DDR3                       |
| Flash                 | 4GB NAND Flash                   |
| Display               | 4.3" TFT LCD, 480x272            |
| Face Recognition      | Yes                              |
| Power                 | DC12V/POE Optional               |
| Standby power         | 3W                               |
| Rated Power           | 10W                              |
| Button                | Touch button                     |
| RFID Card Reader      | IC/ID Optional, 100,000 pcs      |
| Temperature           | -40°C - +70°C                    |
| Humidity              | 20%-93%                          |
| IP Class              | IP65                             |
| Multiple Installation | Flush Mounted or Surface Mounted |
| Audio & Video         |                                  |
| Audio Codec           | G.711                            |
| Video Codec           | H.264                            |
| Camera                | CMOS 2M pixel (WDR)              |
| LED Night Vision      | Yes                              |
| Network               |                                  |
| Ethernet              | 10M/100Mbps, RJ-45               |
| Protocol              | TCP/IP, SIP, RTSP                |
| Interface             |                                  |
| Relay output          | Yes                              |
| Exit Button           | Yes                              |
| RS485                 | Yes                              |
| Door Magnetic         | Yes                              |

### Key features:

- Open the door by face recognition with 99% accuracy (10,000 users)
- Open the door by IC/ID card (100,000 users)
- Liveness detection optional
- Standard SIP 2.0
- Android based
- POE Optional

### Dimension & Installation:

|  |                   |                |
|--|-------------------|----------------|
|  | Product Size      | 158x380x54.5mm |
|  | Built-in box size | 142x358x59.5mm |
|  | Installation size | 148x364x65mm   |

